


# Model CZ12KP Pole Trailer

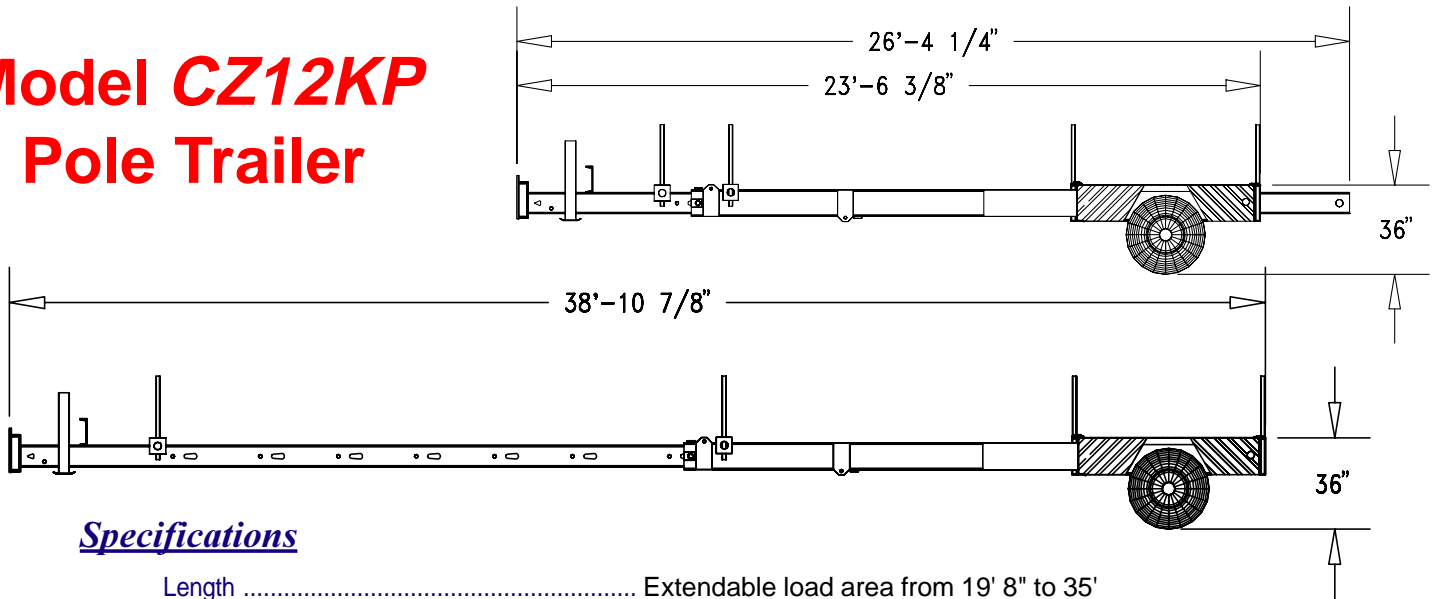

## Specifications

Length .....	Extendable load area from 19' 8" to 35' (Other configurations available)
Width .....	6' 6"
Running Gear .....	One 12,000 lb. dual wheel axle with oil-seal hubs
Brakes .....	12 1/4" electric with self-charging break-a-way system
Landing Gear .....	12,000# drop leg jack
Wheels .....	16.5" 8 hole disc
Tires .....	9.50 x 16.5 10-ply rating
Tongue .....	8" x 1/4" and 10" x 1/4" square tube, telescopes on rollers
Frame .....	14" WF beam and 10" channel
Coupling System .....	2 1/2" adjustable pintle eye
Lights .....	Sealed beam with waterproof wiring in conduit
GVWR .....	15,800 lbs. at 54 mph
Empty Weight .....	3,854 lbs.
Payload .....	Approximately 12,000 lbs.

## Options


Raised bolsters for sliding stanchions  
Water-tight storage boxes  
Portable light bar

Built-in strap winches  
Extended storage area  
Various other options

10,000 lb and 15,000 lb axles

APPROXIMATE POLE CARRYING CAPACITY		
30'	class 6	16 poles
35'	class 6	13 poles
40'	class 6	13 poles
40'	class 5	9 poles
45'	class 6	9 poles
45'	class 5	8 poles
50'	class 4	6 poles
50'	class 3	5 poles
55'	class 4	5 poles
55'	class 3	4 poles
60'	class 4	4 poles
60'	class 3	4 poles

(New penta treated poles)

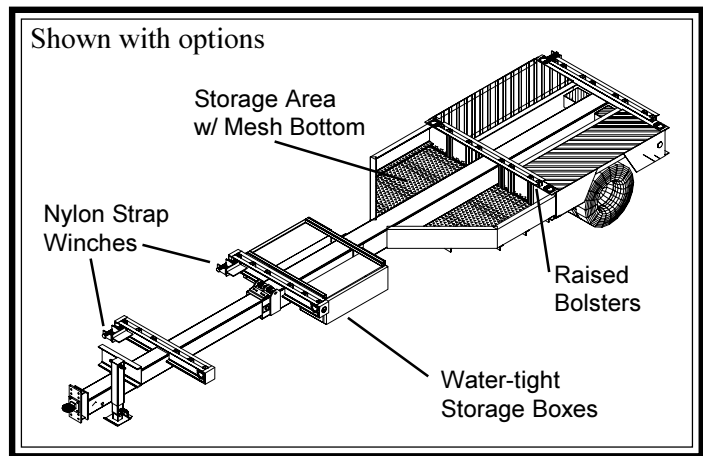

**MANUFACTURED BY:**  
**CZ ENGINEERING, INC**  
HCR 60, BOX 296  
DIXON, MISSOURI 65459  
(573) 759-2144 FAX (573) 759-2147  
[www.cze.com](http://www.cze.com)